KubeCon CloudNativeCon North America 2026

#KubeCon #CloudNativeCon

Ask Your Platform: Putting AI to Work Where the Questions Live



503 Service Temporarily Unavailable

URGENT!!! App returns 503, please help

Waiting for support · High priority · ingress · 503

Description

I deployed our checkout app and exposed it through the ingress, but the URL returns 503. The pod is running and the logs look fine.

Can someone take a look? We have a demo on Thursday.

Activity Oldest first, newest at the bottom

Monday

PS **Platform Support** `9:15 AM`

Ticket added to the support queue. Expected first response: 1 business day.

Status
Waiting for support

Reporter
Bob

Assignee
John

Created
Mon 9:14 AM

Time open
1 minute

Answer found
Not yet

URGENT!!! App returns 503, please help

Waiting for support · High priority · ingress · 503

Description

I deployed our checkout app and exposed it through the ingress, but the URL returns 503. The pod is running and the logs look fine.

Can someone take a look? We have a demo on Thursday.

Activity Oldest first, newest at the bottom

Monday

PS **Platform Support** 9:15 AM
Ticket added to the support queue. Expected first response: 1 business day.

JO **John** Support 1:40 PM
Which cluster and namespace is this?

Status
Waiting for support

Reporter
Bob

Assignee
John

Created
Mon 9:14 AM

Time open
4 hours

Answer found
Not yet

URGENT!!! App returns 503, please help

Waiting for support · High priority · ingress · 503

Description

I deployed our checkout app and exposed it through the ingress, but the URL returns 503. The pod is running and the logs look fine.

Can someone take a look? We have a demo on Thursday.

Activity Oldest first, newest at the bottom

Monday

PS **Platform Support** `9:15 AM`
Ticket added to the support queue. Expected first response: 1 business day.

JO **John** Support `1:40 PM`
Which cluster and namespace is this?

BO **Bob** `3:02 PM`
`dev-east-2`, namespace `payments-api-dev`. The URL is `checkout.dev.example.com`.

Status
Waiting for support

Reporter
Bob

Assignee
John

Created
Mon 9:14 AM

Time open
5 hours

Answer found
Not yet

Platform Support / PLAT-4821

URGENT!!! App returns 503, please help

Waiting for support · High priority · ingress · 503

Description

I deployed our checkout app and exposed it through the ingress, but the URL returns 503. The pod is running and the logs look fine.

Can someone take a look? We have a demo on Thursday.

Activity Oldest first, newest at the bottom

Monday

PS **Platform Support** `9:15 AM`

Ticket added to the support queue. Expected first response: 1 business day.

JO **John** Support `1:40 PM`

Which cluster and namespace is this?

BO **Bob** `3:02 PM`

`dev-east-2`, namespace `payments-api-dev`. The URL is `checkout.dev.example.com`.

Tuesday

JO **John** Support `8:55 AM`

Can you send the ingress controller logs for your host?

Status
Waiting for support

Reporter
Bob

Assignee
John

Created
Mon 9:14 AM

Time open
23 hours

Answer found
Not yet

Platform Support / PLAT-4821

URGENT!!! App returns 503, please help

Waiting for support · High priority · ingress · 503

Description

I deployed our checkout app and exposed it through the ingress, but the URL returns 503. The pod is running and the logs look fine.

Can someone take a look? We have a demo on Thursday.

Activity Oldest first, newest at the bottom

Monday

PS **Platform Support** `9:15 AM`

Ticket added to the support queue. Expected first response: 1 business day.

JO **John** Support `1:40 PM`

Which cluster and namespace is this?

BO **Bob** `3:02 PM`

`dev-east-2`, namespace `payments-api-dev`. The URL is `checkout.dev.example.com`.

Tuesday

JO **John** Support `8:55 AM`

Can you send the ingress controller logs for your host?

BO **Bob** `10:30 AM`

I don’t have access to that namespace. I attached a screenshot from the dashboard instead. Does that help?

Status
Waiting for support

Reporter
Bob

Assignee
John

Created
Mon 9:14 AM

Time open
1 day, 1 hour

Answer found
Not yet

Platform Support / PLAT-4821

URGENT!!! App returns 503, please help

Waiting for support · High priority · ingress · 503

Description

I deployed our checkout app and exposed it through the ingress, but the URL returns 503. The pod is running and the logs look fine.

Can someone take a look? We have a demo on Thursday.

Activity Oldest first, newest at the bottom

Monday

PS **Platform Support** `9:15 AM`

Ticket added to the support queue. Expected first response: 1 business day.

JO **John** Support `1:40 PM`

Which cluster and namespace is this?

BO **Bob** `3:02 PM`

`dev-east-2`, namespace `payments-api-dev`. The URL is `checkout.dev.example.com`.

Tuesday

JO **John** Support `8:55 AM`

Can you send the ingress controller logs for your host?

BO **Bob** `10:30 AM`

I don’t have access to that namespace. I attached a screenshot from the dashboard instead. Does that help?

JO **John** Support `2:12 PM`

Looking now. Checking the ingress.

Status
Waiting for support

Reporter
Bob

Assignee
John

Created
Mon 9:14 AM

Time open
1 day, 4 hours

Answer found
Not yet

Platform Support / PLAT-4821

URGENT!!! App returns 503, please help

Waiting for support | High priority | ingress | 503

Description

I deployed our checkout app and exposed it through the ingress, but the URL returns 503. The pod is running and the logs look fine.

Can someone take a look? We have a demo on Thursday.

Activity Oldest first, newest at the bottom

Monday

Platform Support `9:15 AM`

Ticket added to the support queue. Expected first response: 1 business day.

John Support `1:40 PM`

Which cluster and namespace is this?

Bob `3:02 PM`

`dev-east-2`, namespace `payments-api-dev`. The URL is `checkout.dev.example.com`.

Tuesday

John Support `8:55 AM`

Can you send the ingress controller logs for your host?

Bob `10:30 AM`

I don’t have access to that namespace. I attached a screenshot from the dashboard instead. Does that help?

John Support `2:12 PM`

Looking now. Checking the ingress.

Wednesday

Bob `9:20 AM`

Any update?

Status
Waiting for support

Reporter
Bob

Assignee
John

Created
Mon 9:14 AM

Time open
2 days, 0 hours

Answer found
Not yet

Platform Support / PLAT-4821

URGENT!!! App returns 503, please help

Waiting for support · High priority · ingress · 503

Description

I deployed our checkout app and exposed it through the ingress, but the URL returns 503. The pod is running and the logs look fine.

Can someone take a look? We have a demo on Thursday.

Activity Oldest first, newest at the bottom

Monday

PS **Platform Support** `9:15 AM`

Ticket added to the support queue. Expected first response: 1 business day.

JO **John** Support `1:40 PM`

Which cluster and namespace is this?

BO **Bob** `3:02 PM`

`dev-east-2`, namespace `payments-api-dev`. The URL is `checkout.dev.example.com`.

Tuesday

JO **John** Support `8:55 AM`

Can you send the ingress controller logs for your host?

BO **Bob** `10:30 AM`

I don’t have access to that namespace. I attached a screenshot from the dashboard instead. Does that help?

JO **John** Support `2:12 PM`

Looking now. Checking the ingress.

Wednesday

BO **Bob** `9:20 AM`

Any update?

JO **John** Support `3:48 PM`

Still investigating. Will update soon.

Status
Waiting for support

Reporter
Bob

Assignee
John

Created
Mon 9:14 AM

Time open
2 days, 6 hours

Answer found
Not yet

Two days later...

KubeCon CloudNativeCon North America 2026

#KubeCon #CloudNativeCon

Ask Your Platform: Putting AI to Work Where the Questions Live

Anton Alexander & Scott Adams
Container Platform Engineering @ Fortune 100 Company




Who asks what, and where do they go?



Bob
Application Developer



John
Platform Engineer

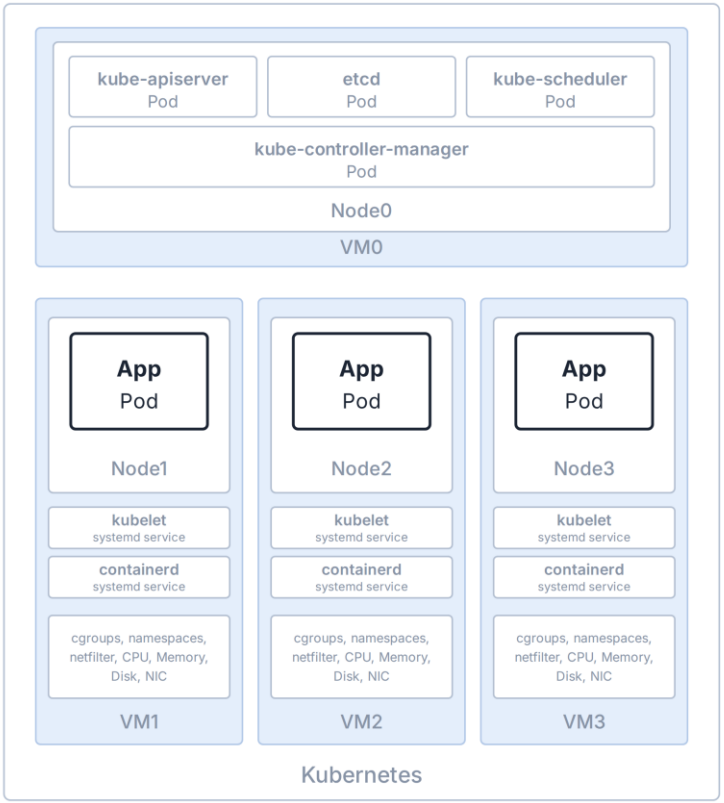

Who asks what, and where do they go?

"why does my app return 503?"





Bob
Application Developer

"where do I even start?"



John
Platform Engineer

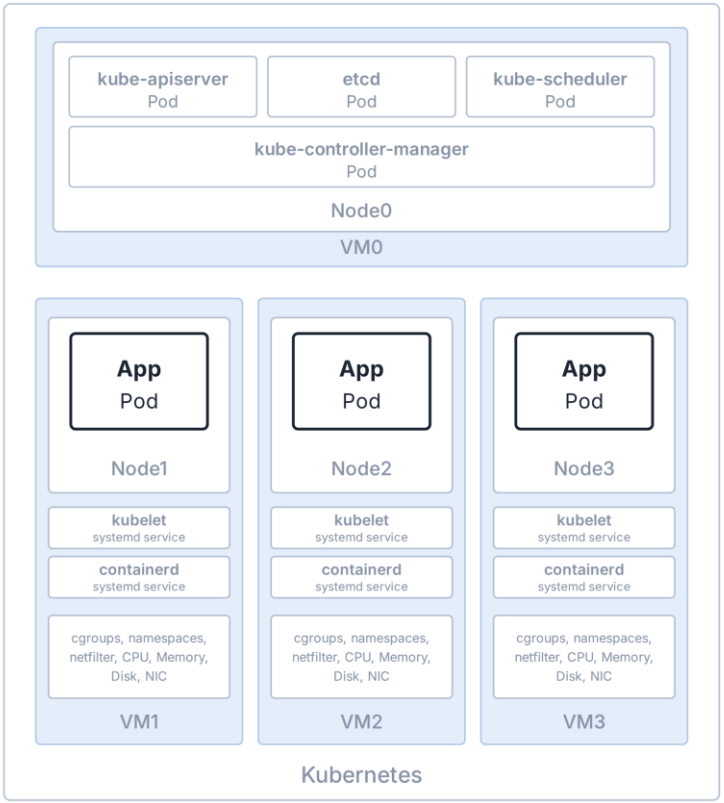

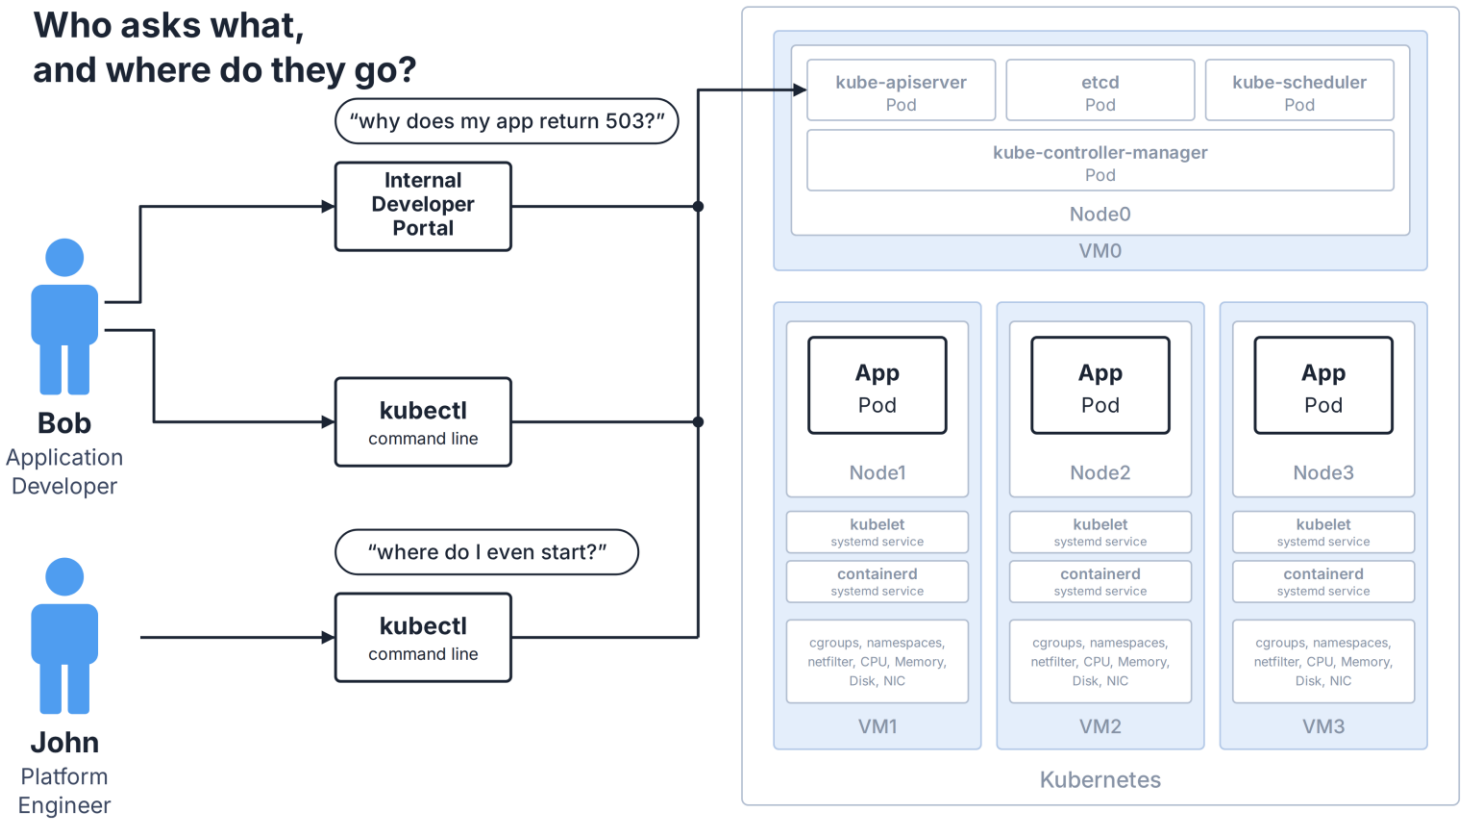
Who asks what,
and where do they go?
"why does my app return 503?"
Internal Developer Portal
Bob
Application Developer
kubectl
command line
"where do I even start?"
kubectl
command line
John
Platform Engineer
kube-apiserver
Pod
etcd
Pod
kube-scheduler
Pod
kube-controller-manager
Pod
Node0
VM0
App
Pod
Node1
kubelet
systemd service
containerd
systemd service
cgroups, namespaces, netfilter, CPU, Memory, Disk, NIC
VM1
App
Pod
Node2
kubelet
systemd service
containerd
systemd service
cgroups, namespaces, netfilter, CPU, Memory, Disk, NIC
VM2
App
Pod
Node3
kubelet
systemd service
containerd
systemd service
cgroups, namespaces, netfilter, CPU, Memory, Disk, NIC
VM3
Kubernetes

Start with a question.

Start with a question.


Not an AI product.

Start with a question.


Not an AI product.

Put AI where the question lives.

Who: app developer
When: NOW
Where: Kubernetes API

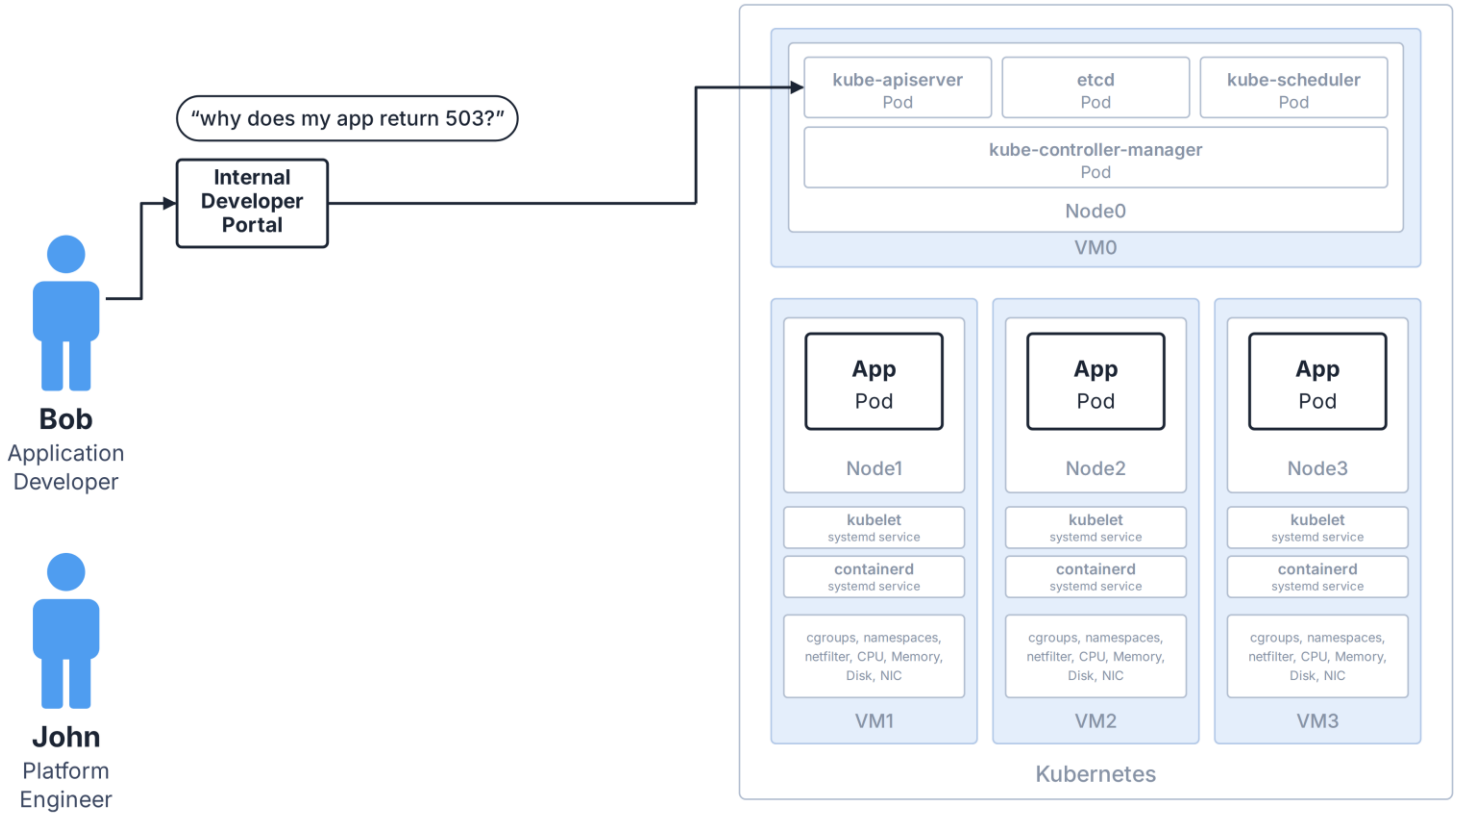
"why does my app return 503?"
Internal Developer Portal
Bob
Application Developer
John
Platform Engineer
kube-apiserver
Pod
etcd
Pod
kube-scheduler
Pod
kube-controller-manager
Pod
Node0
VM0
App
Pod
Node1
Node2
Node3
kubelet
systemd service
containerd
systemd service
cgroups, namespaces, netfilter, CPU, Memory, Disk, NIC
VM1
VM2
VM3
Kubernetes

Same questions, with AI in the path.

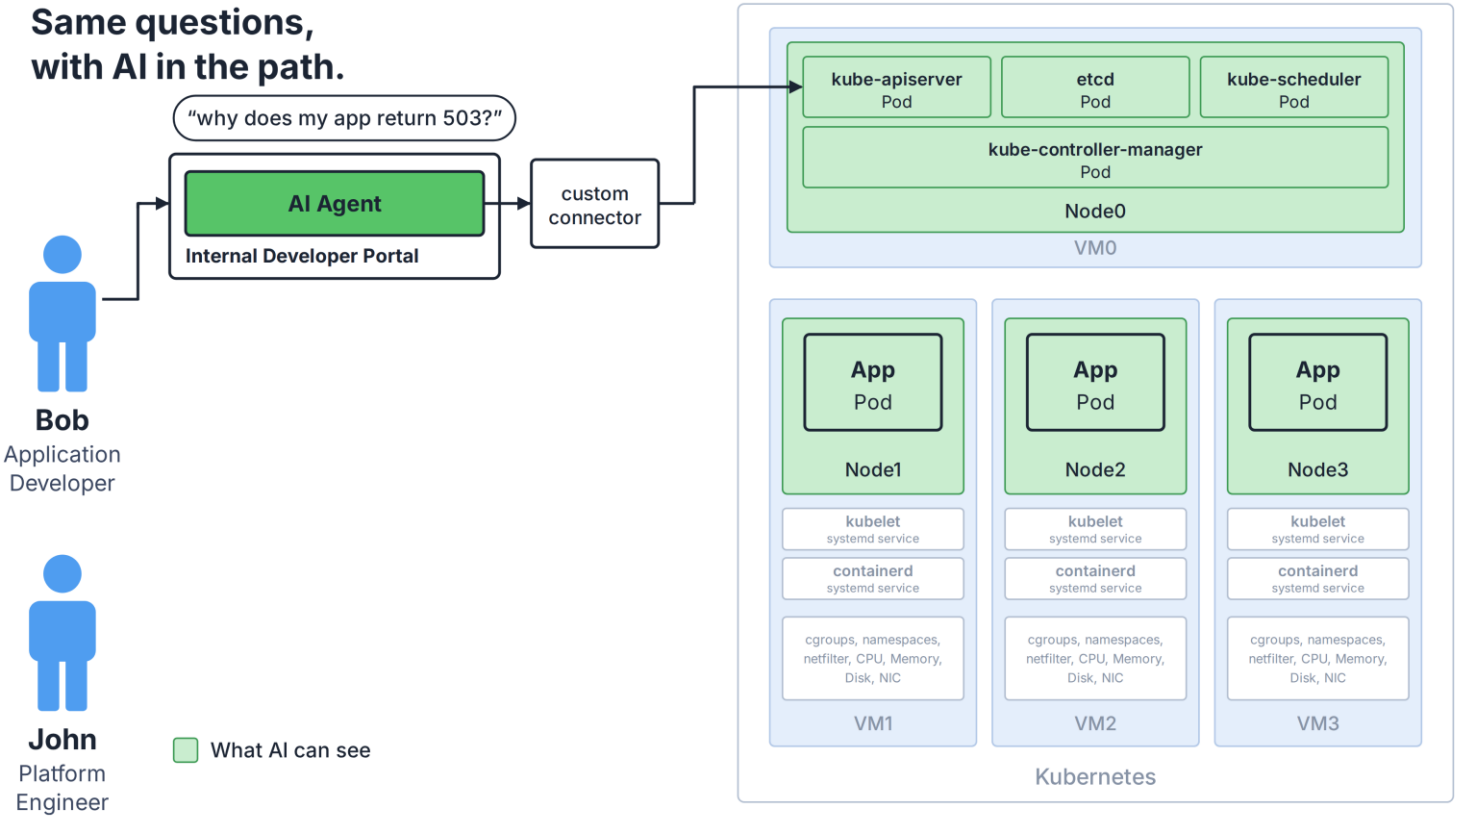

Overview
Workloads
Networking
Config
Events
Assistant

Namespace assistant

dev-east-2 payments-api-dev

Bob

I deployed our checkout app and exposed it through the ingress, but the URL returns 503. The pod is running and the logs look fine.

Ask about payments-api-dev Enter

Overview
Workloads
Networking
Config
Events
Assistant

Namespace assistant

dev-east-2 payments-api-dev

Bob

I deployed our checkout app and exposed it through the ingress, but the URL returns 503. The pod is running and the logs look fine.

Assistant AI

Calling the cluster dev-east-2 / payments-api-dev

✓	**get_ingress** checkout	190 ms
✓	**get_service** checkout	150 ms
✓	**list_endpoints** checkout	140 ms
✓	**list_pods** app=checkout	170 ms

Ask about payments-api-dev

```
$ kubectl -n payments-api-dev get svc checkout -o wide
NAME       TYPE        CLUSTER-IP     EXTERNAL-IP   PORT(S)   AGE   SELECTOR
checkout   ClusterIP   10.96.41.17    <none>        80/TCP    12m   app=checkout
```

```
$ kubectl -n payments-api-dev get pods -L app
NAME                            READY   STATUS    RESTARTS   AGE   APP
checkout-api-7d9f8b6c5-x4k2p    1/1     Running   0          12m   checkout-api
checkout-api-7d9f8b6c5-m8q7z    1/1     Running   0          12m   checkout-api
checkout-api-7d9f8b6c5-t5v9c    1/1     Running   0          12m   checkout-api
```

Developer Portal | Cluster dev-east-2 | Namespace payments-api-dev | Bob

- Overview
- Workloads
- Networking
- Config
- Events
- Assistant

Namespace assistant

dev-east-2 payments-api-dev

Bob

I deployed our checkout app and exposed it through the ingress, but the URL returns 503. The pod is running and the logs look fine.

Assistant AI

Used ✓ get_ingress ✓ get_service ✓ list_endpoints ✓ list_pods

The ingress is fine. Your `checkout` service has no endpoints, so there is nowhere to send traffic and you get a 503.

The service selects pods labeled `app: checkout`, but your pods are labeled `app: checkout-api`.

Ask about payments-api-dev

```
$ kubectl -n payments-api-dev get svc checkout -o wide
NAME       TYPE        CLUSTER-IP     EXTERNAL-IP   PORT(S)   AGE   SELECTOR
checkout   ClusterIP   10.96.41.17    <none>        80/TCP    12m   app=checkout
```

```
$ kubectl -n payments-api-dev get pods -L app
NAME                            READY   STATUS    RESTARTS   AGE   APP
checkout-api-7d9f8b6c5-x4k2p    1/1     Running   0          12m   checkout-api
checkout-api-7d9f8b6c5-m8q7z    1/1     Running   0          12m   checkout-api
checkout-api-7d9f8b6c5-t5v9c    1/1     Running   0          12m   checkout-api
```

Overview
Workloads
Networking
Config
Events
Assistant

Namespace assistant

dev-east-2 payments-api-dev

Bob

I deployed our checkout app and exposed it through the ingress, but the URL returns 503. The pod is running and the logs look fine.

Assistant AI

Used ✓ get_ingress ✓ get_service ✓ list_endpoints ✓ list_pods

The ingress is fine. Your `checkout` service has no endpoints, so there is nowhere to send traffic and you get a 503.

The service selects pods labeled `app: checkout`, but your pods are labeled `app: checkout-api`.

Bob

What should I change?


Assistant AI

Used ✓ get_service ✓ list_pods

Change the selector in your `checkout` service to `app: checkout-api`, and traffic will flow.

It's in your own manifest.

Ask about payments-api-dev Enter

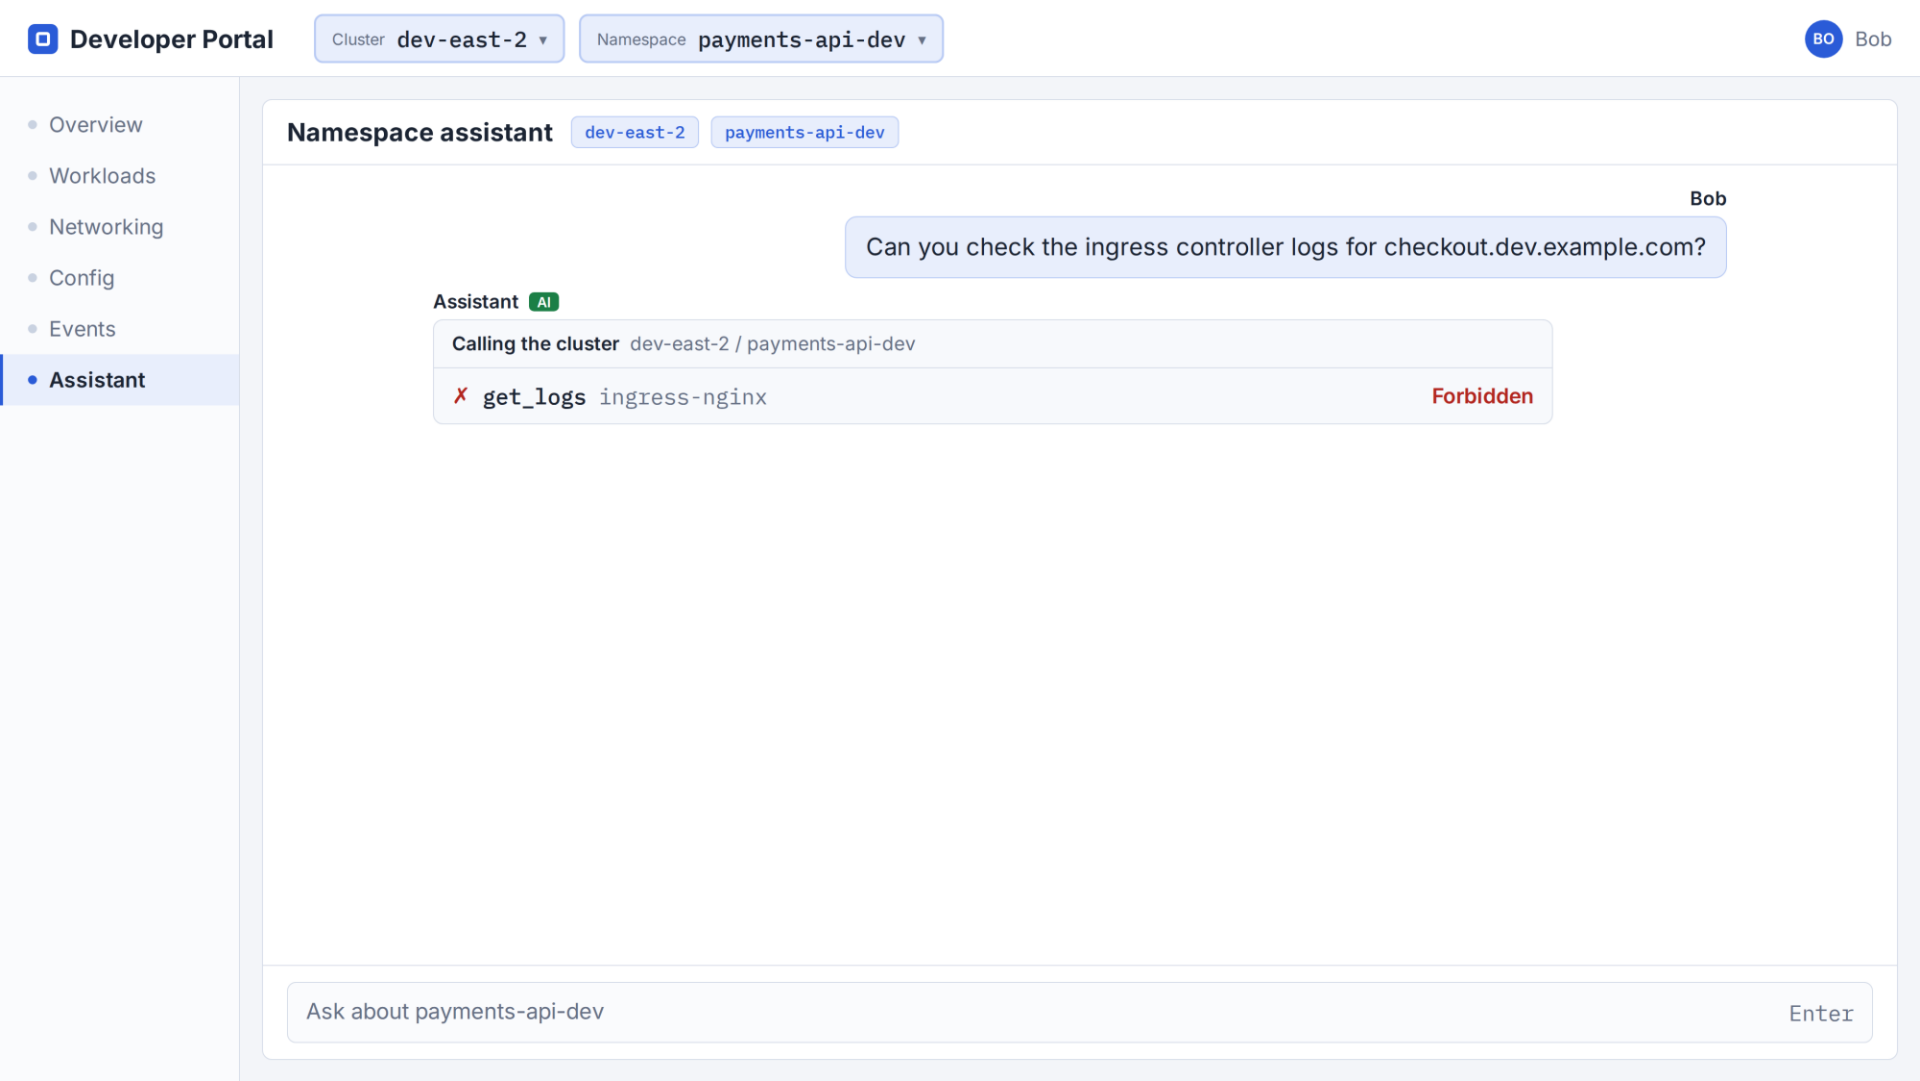
Developer Portal
Cluster dev-east-2
Namespace payments-api-dev
BO Bob
Overview
Workloads
Networking
Config
Events
Assistant
Namespace assistant
dev-east-2
payments-api-dev
Bob
Can you check the ingress controller logs for checkout.dev.example.com?
Assistant AI
Calling the cluster dev-east-2 / payments-api-dev
✗ get_logs ingress-nginx
Forbidden
Ask about payments-api-dev
Enter

Overview
Workloads
Networking
Config
Events
Assistant

Namespace assistant

dev-east-2 All namespaces

John

Can you check the ingress controller logs for checkout.dev.example.com?

Assistant AI


Used ✓ get_logs


I found 503 responses for `checkout.dev.example.com` in the ingress controller logs.

The controller has no upstream endpoints for that service.

Ask about all namespaces Enter

Who: platform engineer
When: NOW
Where: Kubernetes API

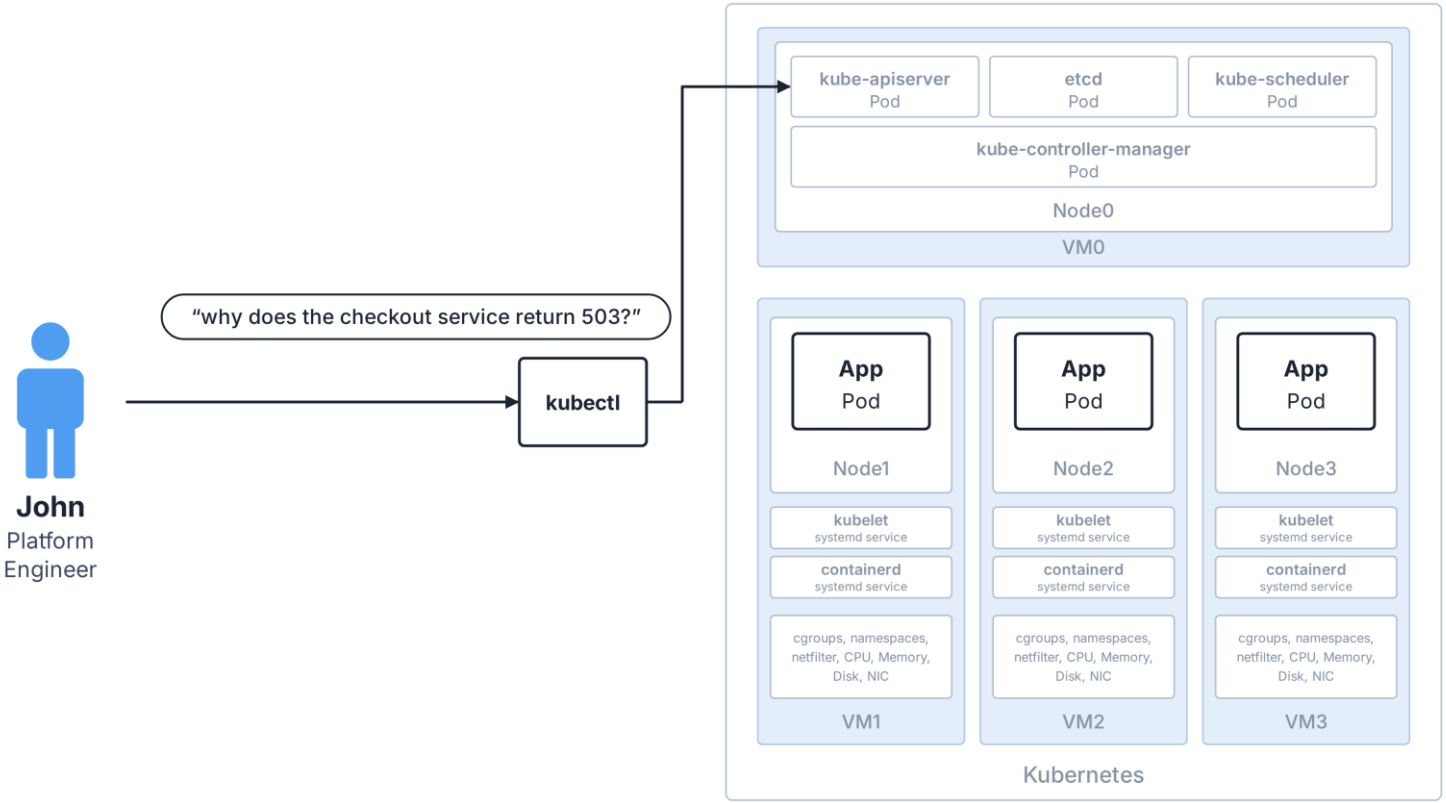
"why does the checkout service return 503?"
kubectl
John
Platform Engineer
kube-apiserver
Pod
etcd
Pod
kube-scheduler
Pod
kube-controller-manager
Pod
Node0
VM0
App
Pod
Node1
kubelet
systemd service
containerd
systemd service
cgroups, namespaces, netfilter, CPU, Memory, Disk, NIC
VM1
App
Pod
Node2
kubelet
systemd service
containerd
systemd service
cgroups, namespaces, netfilter, CPU, Memory, Disk, NIC
VM2
App
Pod
Node3
kubelet
systemd service
containerd
systemd service
cgroups, namespaces, netfilter, CPU, Memory, Disk, NIC
VM3
Kubernetes

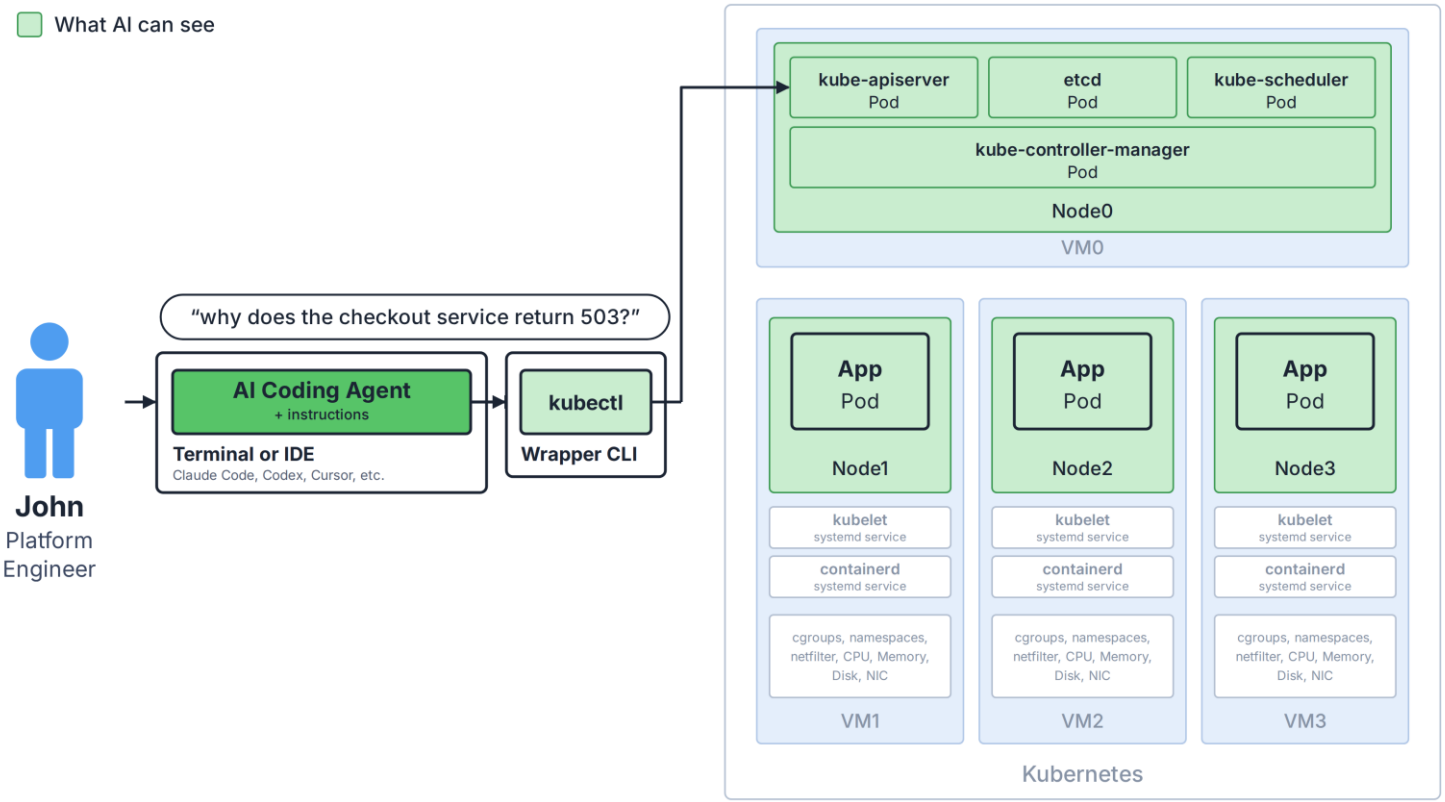
What AI can see
"why does the checkout service return 503?"
John
Platform Engineer
AI Coding Agent
+ instructions
Terminal or IDE
Claude Code, Codex, Cursor, etc.
kubectl
Wrapper CLI
kube-apiserver
Pod
etcd
Pod
kube-scheduler
Pod
kube-controller-manager
Pod
Node0
VM0
App
Pod
Node1
kubelet
systemd service
containerd
systemd service
cgroups, namespaces, netfilter, CPU, Memory, Disk, NIC
VM1
App
Pod
Node2
kubelet
systemd service
containerd
systemd service
cgroups, namespaces, netfilter, CPU, Memory, Disk, NIC
VM2
App
Pod
Node3
kubelet
systemd service
containerd
systemd service
cgroups, namespaces, netfilter, CPU, Memory, Disk, NIC
VM3
Kubernetes



Why does the checkout service return 503?

```
❯ Why does the checkout service in the payments-api-dev namespace return 503?

✳ Scurrying… (4s · ↓ 50 tokens · thinking with medium effort)

❯

⏸ manual mode on · esc to interrupt                Update available! Run: brew upgrade claude-code@latest
```

Guarded access

Instructions	guidance, not enforcement

Guarded access

Instructions	guidance, not enforcement
Wrapper CLI	blocks writes, bounds output

Guarded access

Instructions	guidance, not enforcement
Wrapper CLI	blocks writes, bounds output
Permission rules	raw kubectl and shells are denied

Claude Code · .claude/settings.json


```
{
  "permissions": {
    "deny": ["Bash(kubectl:*)"]
  }
}
```

Codex · ~/.codex/rules/default.rules

```
prefix_rule(
  pattern = ["kubectl"],
  decision = "forbidden",
)
```

Guarded access

Instructions	guidance, not enforcement
Wrapper CLI	blocks writes, bounds output
Permission rules	raw kubectl and shells are denied
Shared repo	everyone gets the same guardrails

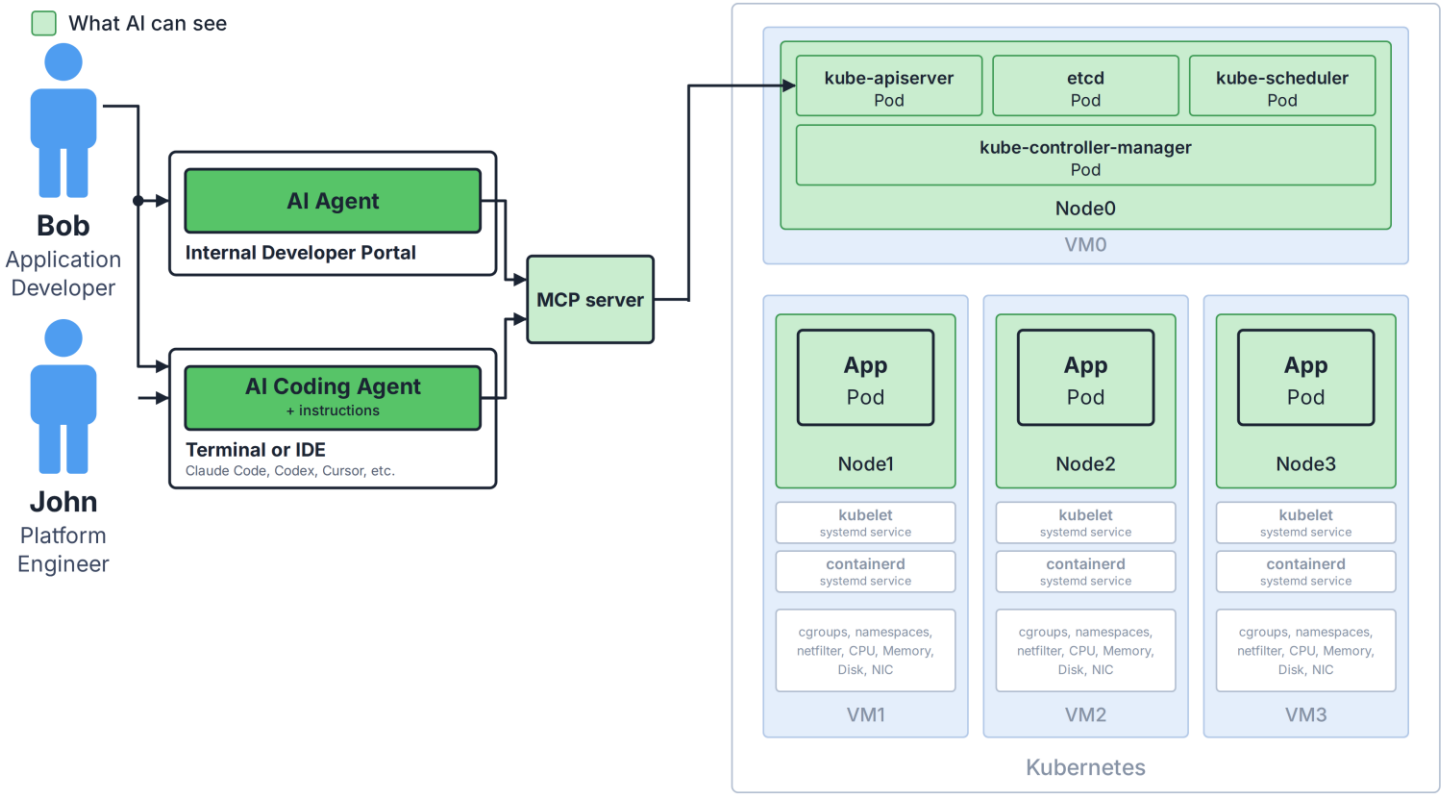
What AI can see
Bob
Application Developer
John
Platform Engineer
AI Agent
Internal Developer Portal
AI Coding Agent
+ instructions
Terminal or IDE
Claude Code, Codex, Cursor, etc.
MCP server
kube-apiserver
Pod
etcd
Pod
kube-scheduler
Pod
kube-controller-manager
Pod
Node0
VM0
App
Pod
Node1
App
Pod
Node2
App
Pod
Node3
kubelet
systemd service
containerd
systemd service
cgroups, namespaces, netfilter, CPU, Memory, Disk, NIC
VM1
VM2
VM3
Kubernetes

Who: platform engineer
When: NOW
Where: node OS

Questions Kubernetes can’t answer




John
Platform
Engineer


Can the cluster reach the checkout service?


Is the kubelet running on this node?

Is /var/log full on this node?

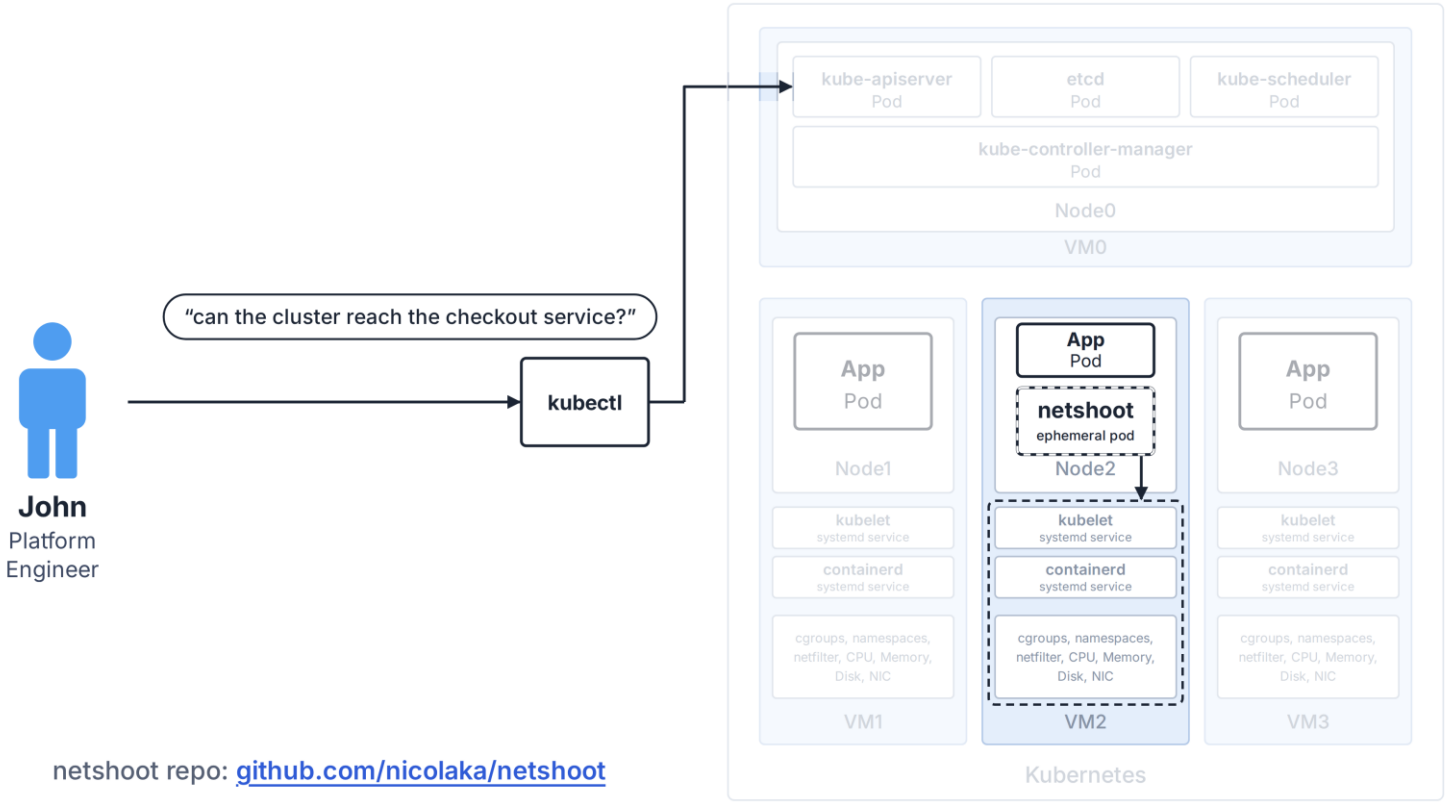

netshoot repo: github.com/nicolaka/netshoot

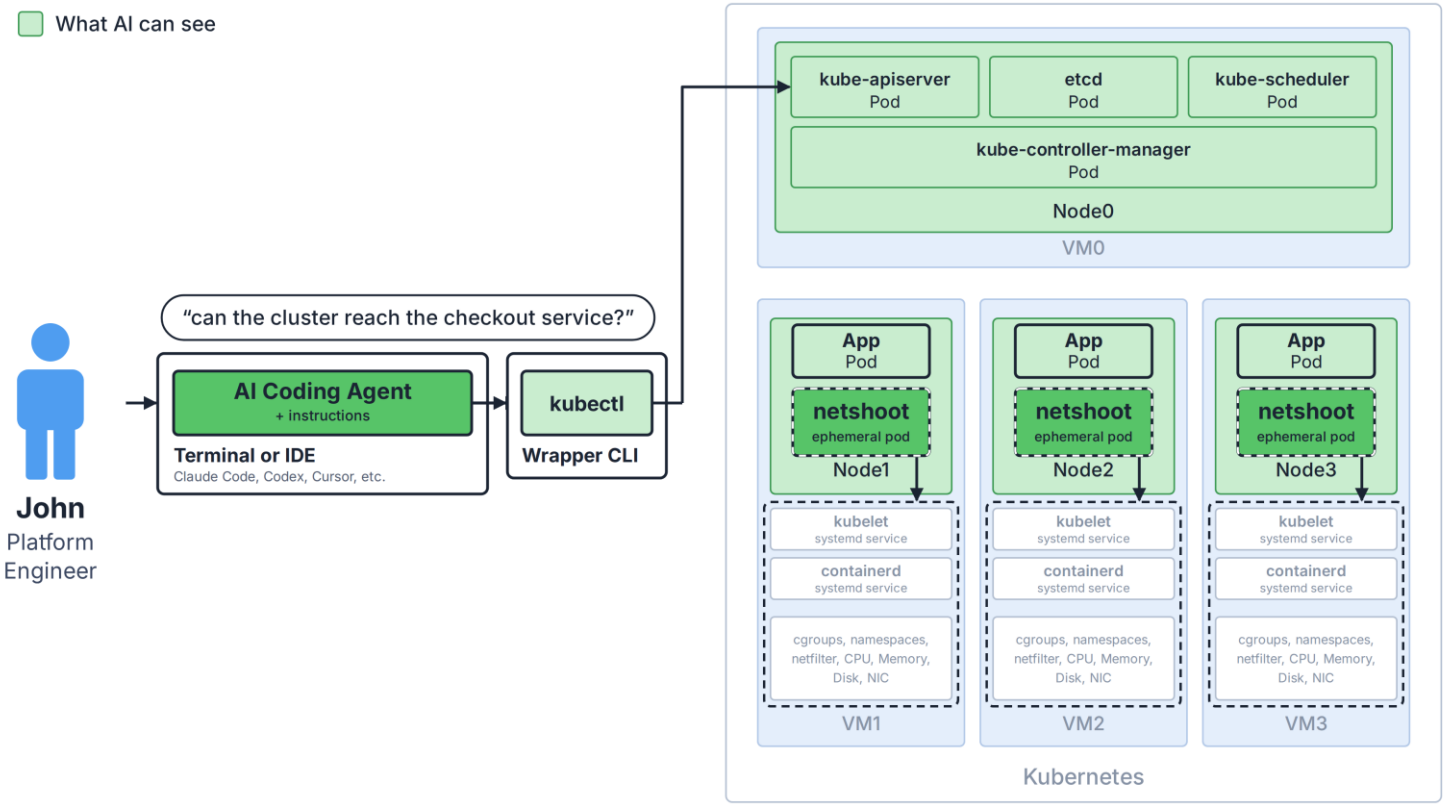
What AI can see
"can the cluster reach the checkout service?"
John
Platform Engineer
AI Coding Agent
+ instructions
Terminal or IDE
Claude Code, Codex, Cursor, etc.
kubectl
Wrapper CLI
kube-apiserver Pod
etcd Pod
kube-scheduler Pod
kube-controller-manager Pod
Node0
VM0
App Pod
netshoot ephemeral pod
Node1
Node2
Node3
kubelet systemd service
containerd systemd service
cgroups, namespaces, netfilter, CPU, Memory, Disk, NIC
VM1
VM2
VM3
Kubernetes

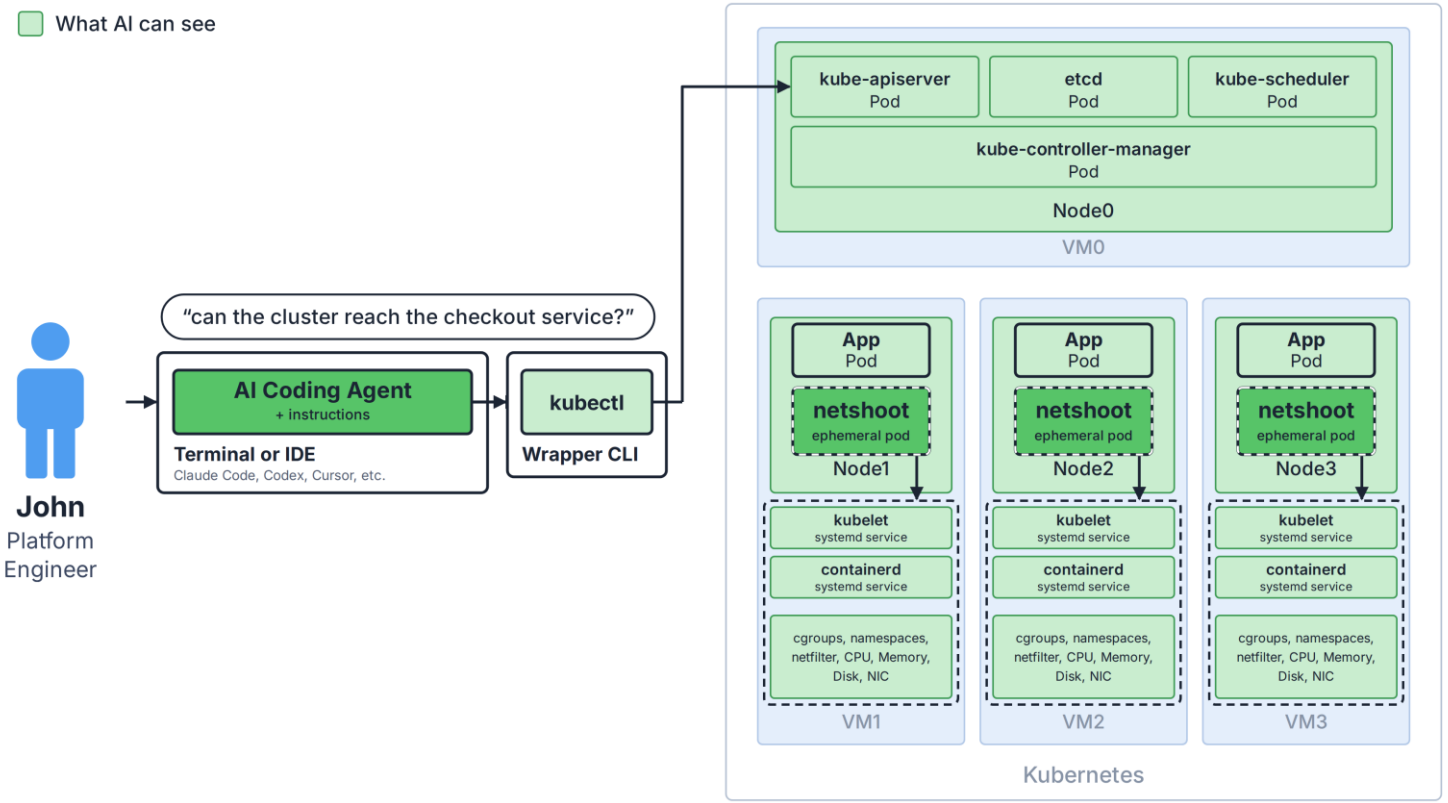
What AI can see
"can the cluster reach the checkout service?"
John
Platform Engineer
AI Coding Agent
+ instructions
Terminal or IDE
Claude Code, Codex, Cursor, etc.
kubectl
Wrapper CLI
kube-apiserver
Pod
etcd
Pod
kube-scheduler
Pod
kube-controller-manager
Pod
Node0
VM0
App
Pod
netshoot
ephemeral pod
Node1
kubelet
systemd service
containerd
systemd service
cgroups, namespaces, netfilter, CPU, Memory, Disk, NIC
VM1
App
Pod
netshoot
ephemeral pod
Node2
kubelet
systemd service
containerd
systemd service
cgroups, namespaces, netfilter, CPU, Memory, Disk, NIC
VM2
App
Pod
netshoot
ephemeral pod
Node3
kubelet
systemd service
containerd
systemd service
cgroups, namespaces, netfilter, CPU, Memory, Disk, NIC
VM3
Kubernetes



Can the cluster reach the checkout service?

```
* Cogitated for 2s · done 4:27 PM

❯ Use netshoot on kind-dev-cluster-01 to http-check
  http://checkout-gateway.payments-api-dev.svc.cluster.local and tell me what status comes back.

● netshoot(Netshoot http-check checkout-gateway)
  └ Backgrounded agent (↓ to manage · ctrl+o to expand)

* Nebulizing… (5s · ↓ 457 tokens)

❯

⏸ manual mode on · esc to interrupt · ↓ to manage

● main
○ netshoot  Netshoot http-check checkout-gateway                    1s
```

```
[2026-10-29 16:27:14] ~ [kind-dev-cluster-01] % kg pod -n netshoot -o wide -w
```

John's terminal without AI

```
# 1. Create a netshoot pod on the node you're asking about
kubectl run netshoot -n payments-api-dev \
  --image=nicolaka/netshoot --restart=Never \
  --overrides='{"spec":{"nodeName":"dev-cluster-01-control-plane"}}' \
  --command -- sleep 3600

# 2. Wait until it's running
kubectl wait -n payments-api-dev --for=condition=Ready pod/netshoot --timeout=60s

# 3. Run the request from inside the cluster
kubectl exec -n payments-api-dev netshoot -- sh -c \
  'curl -v -k --max-time 10 --connect-timeout 5 \
   http://checkout-gateway.payments-api-dev.svc.cluster.local 2>&1 | head -80'

# 4. Clean up
kubectl delete pod -n payments-api-dev netshoot
```

Who: platform engineer
When: THEN
Where: outside the cluster

kubectl talks to one cluster at a time.

kubectl talks to one
cluster at a time.

Kubernetes only remembers now.

kubectl talks to one cluster at a time.

Kubernetes only remembers now.

Events expire after about an hour.
Deleted pods are gone.
A manual edit in the cluster overwrites the old value.

Questions kubectl can’t answer



John
Platform
Engineer

Did this ConfigMap change in the last 15 minutes?


Did any cluster ever run this image?


Which nodes has this deployment ever run on?




John
Platform
Engineer

"what happened before?"

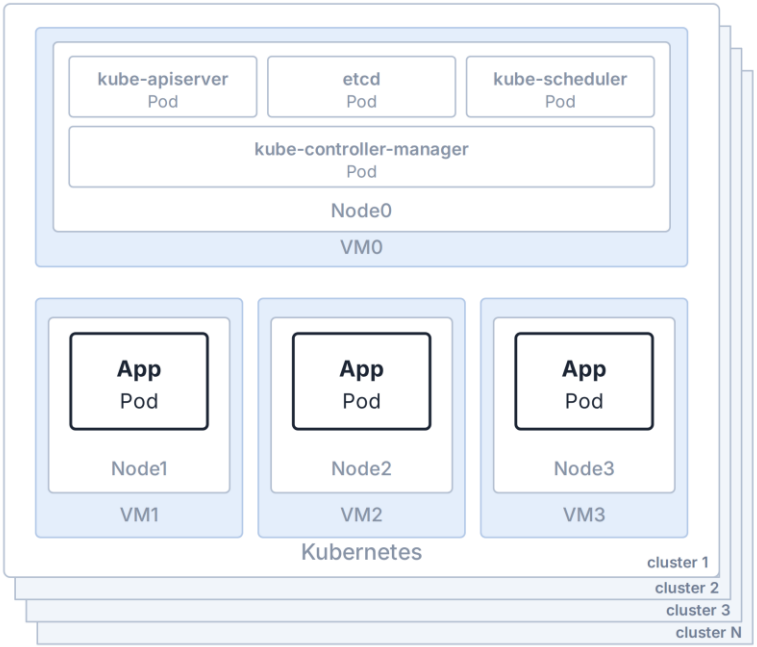


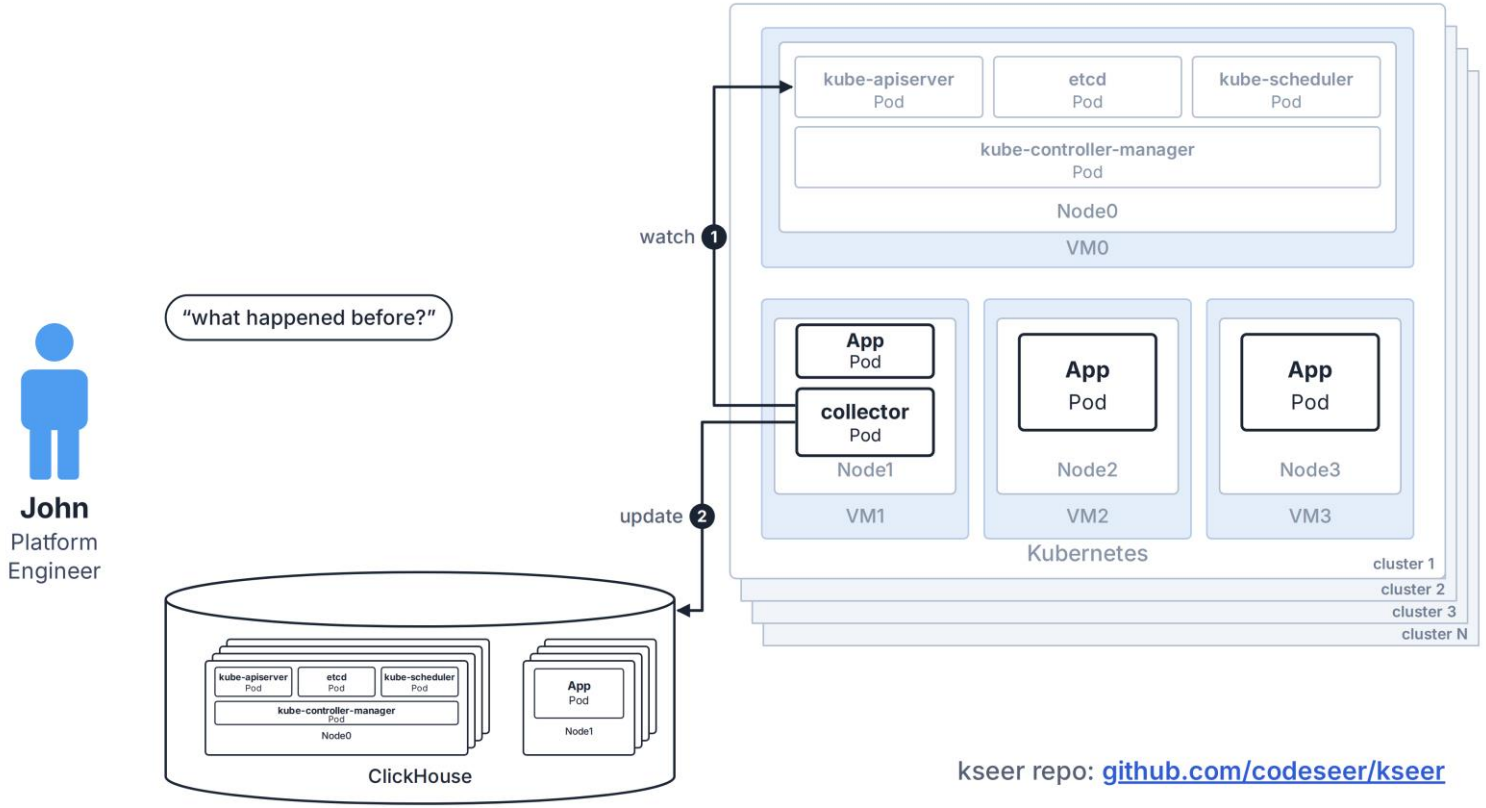

kseer repo: github.com/codeseer/kseer

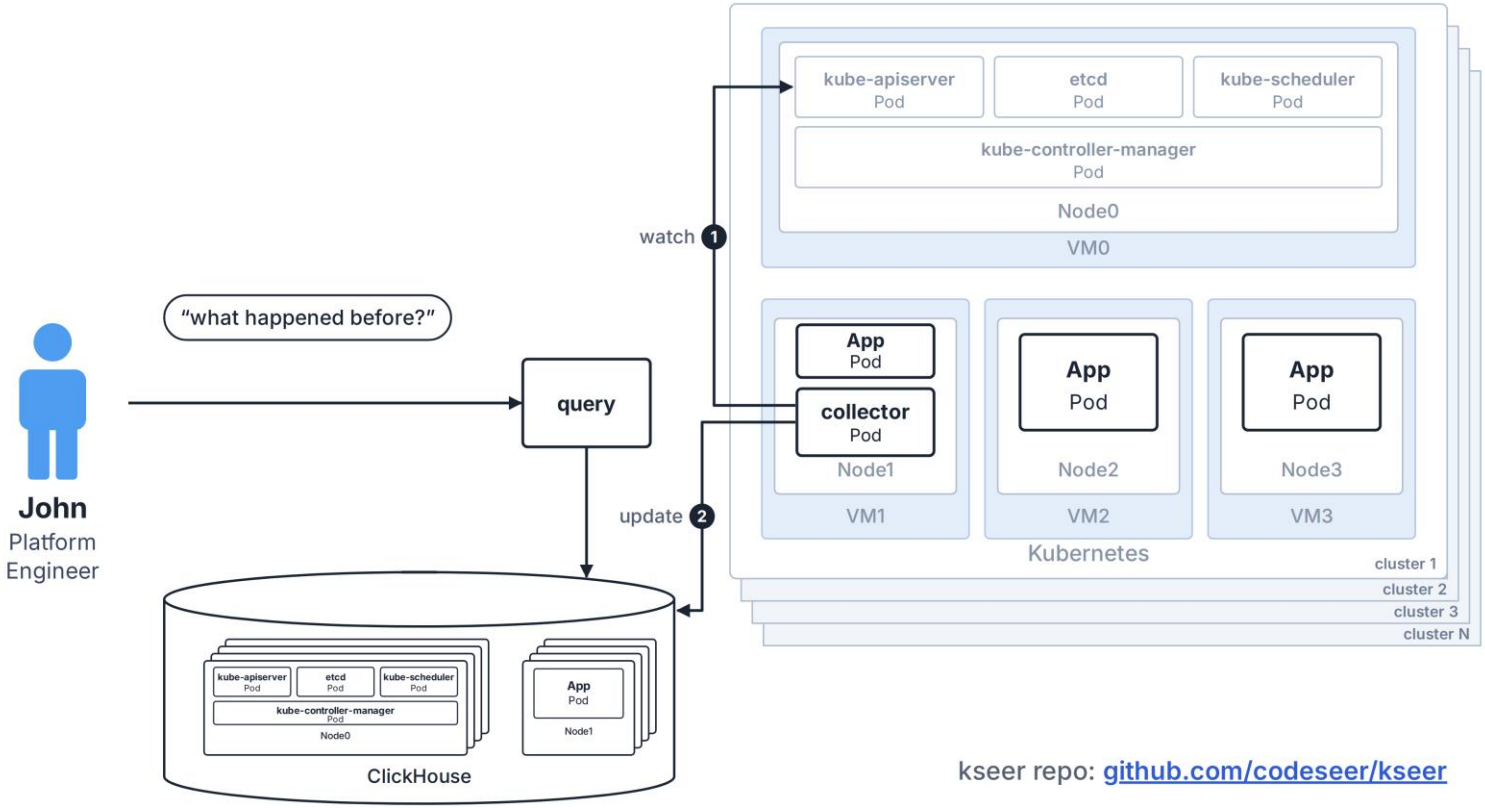

kseer repo: github.com/codeseer/kseer

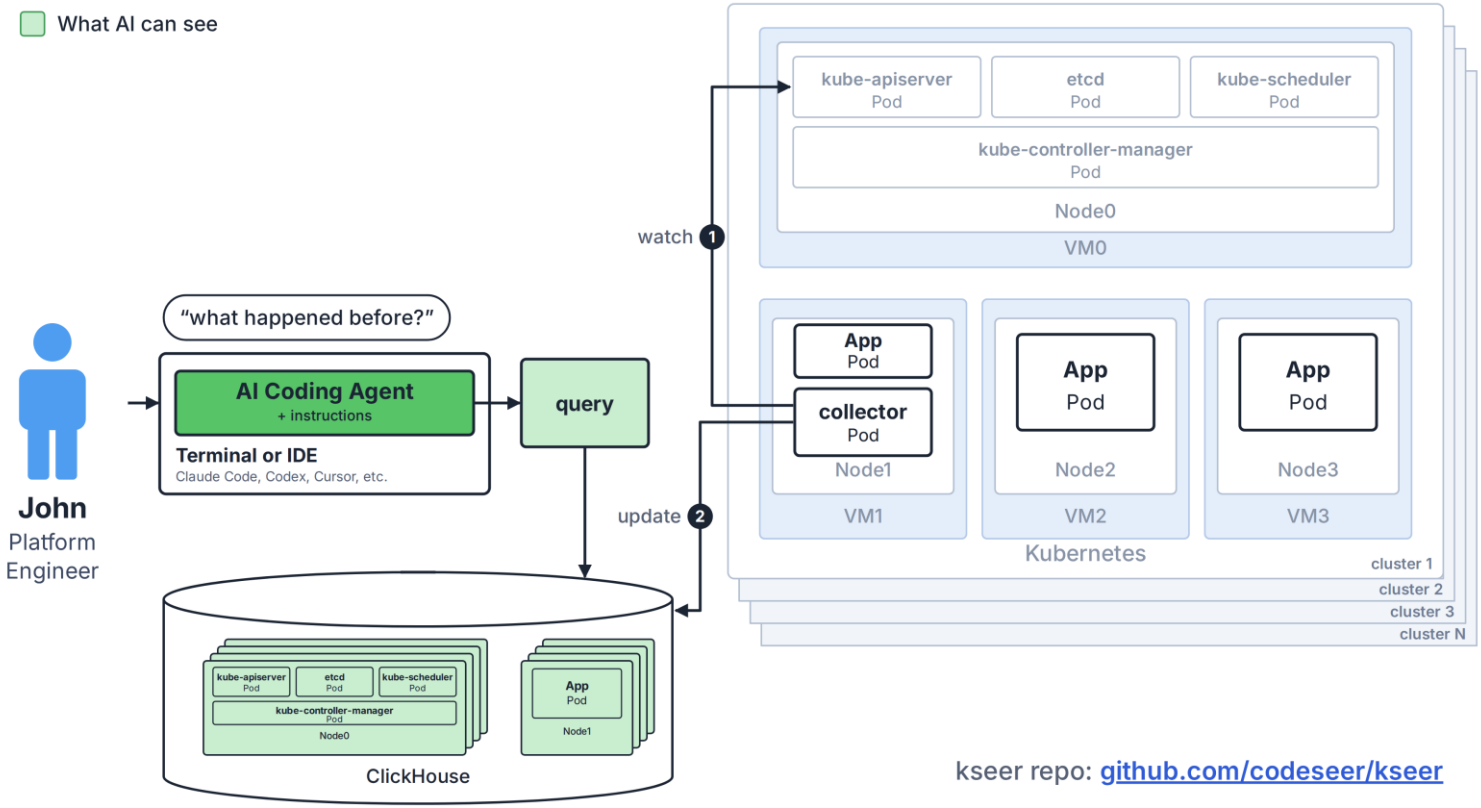

kseer repo: github.com/codeseer/kseer



Did this ConfigMap change in the last 15 minutes?

```
❯ what changed in the orders-api-config configmap in the last 15 minutes?

● k8s-history-analyst(Orders-api-config change history)
  ⎿ Backgrounded agent (↓ to manage · ctrl+o to expand)

● k8s-history-analyst is running. I'll post its answer when it finishes.

✻ Waiting for 1 background agent to finish

❯ show me the result

⏸ manual mode on · ? for shortcuts · ↓ to manage   Update available! Run: brew upgrade claude-code@latest
                                                                          ◐ medium · /effort

● main
○ k8s-history-analyst  Orders-api-config change history                   8s · ↓ 7.6k tokens
```



Did any cluster ever run this image?

```
❯ did any cluster ever run this image skynet:judgment-day?

● k8s-history-analyst(Image history across clusters)
  └ Backgrounded agent (↓ to manage · ctrl+o to expand)

● k8s-history-analyst is running. I'll post its answer when it finishes.

✻ Waiting for 1 background agent to finish

● Agent "Image history across clusters" finished · 1m 30s

● Agent: k8s-history-analyst

  Yes, two clusters ran skynet:judgment-day: cluster-1 and cluster-2. cluster-3 has no records of it.

  It ran as Deployment checkout in namespace shop, with 2 pods per cluster. Every pod has been deleted since.
```

Cluster	Pod	Started (UTC)	Deleted (UTC)
cluster-1	checkout-6b96c69c64-bg8fz	02:05:47	02:06:24
cluster-1	checkout-6b96c69c64-r68hw	02:05:47	02:06:25
cluster-2	checkout-6b96c69c64-l9pzc	02:05:49	02:06:27
cluster-2	checkout-6b96c69c64-tz7zw	02:05:49	02:06:28

```
  - Duration: each pod ran about 36 seconds and exited cleanly (exit code 0, no restarts).
  - Digest: both clusters ran the same image digest, sha256:8fb1eb24a99c…18c9. The image was loaded onto the nodes directly, not
    pulled from a registry.
  - Search scope: the search covered all kinds, clusters and time. The only hits were checkout objects (Deployment, ReplicaSet, Pod,
    Event) and the two control-plane nodes' image caches. A node cache entry doesn't mean anything ran from it.

✻ Cogitated for 1m 37s · done 7:08 PM
```



Did any cluster ever run this image?

```
❯ did any cluster ever run this image skynet:judgment-day?

● k8s-history-analyst(Image history across clusters)
  └ Backgrounded agent (↓ to manage · ctrl+o to expand)

● k8s-history-analyst is running. I'll post its answer when it finishes.

* Waiting for 1 background agent to finish

──────────────────────────────────────────────────────────────────────────────
Bash command · from the k8s-history-analyst agent
Tip: auto mode handles these prompts for you — choose "switch to auto mode" below
Run shell command

  docker exec -i kseer-local-clickhouse sh -c 'clickhouse-client -u "$CLICKHOUSE_USER" --password "$CLICKHOUSE_PASSWORD" --format
  PrettyCompactMonoBlock' <<'SQL'
  SELECT cluster_name, kind, timestamp, toString(object.metadata.name) AS name,
    arrayFilter(x -> positionCaseInsensitive(x, 'skynet') > 0, JSONExtractKeys(JSONExtractRaw(toString(object), 'status'))) AS k,
    substring(toString(object), positionCaseInsensitive(toString(object), 'skynet:judgment-day') - 80, 200) AS ctx
  FROM kseer.kubernetes_events_local
  WHERE kind = 'Node' AND positionCaseInsensitive(toString(object), 'skynet:judgment-day') > 0
  LIMIT 5;
  SQL

This command requires approval

Do you want to proceed?
❯ 1. Yes
  2. Yes, and don't ask again for: docker exec *
  3. Yes, and switch to auto mode · auto mode handles these prompts for you
  4. No
```



Which nodes has this deployment ever run on?

```
❯ what nodes did the ledger deployment ever run on?

● k8s-history-analyst(Node history for ledger deployment)
  ⎿ Backgrounded agent (↓ to manage · ctrl+o to expand)

● k8s-history-analyst is running. I'll post its answer when it finishes.

✻ Waiting for 1 background agent to finish

● Agent "Node history for ledger deployment" finished · 46s

● Agent: k8s-history-analyst

  The ledger deployment (namespace shop) ran on two nodes: cluster-4-worker and cluster-4-worker2.
```

Pod	Node	First seen (UTC)	Last seen (UTC)	Status
ledger-6564956fdb-mdqks	cluster-4-worker	02:15:53	02:17:24	deleted
ledger-6564956fdb-64d9c	cluster-4-worker	02:15:53	02:17:24	deleted
ledger-6564956fdb-8l2qn	cluster-4-worker2	02:17:24	02:17:25	running
ledger-6564956fdb-lnv92	cluster-4-worker2	02:17:24	02:17:25	running

```
  - Source: a Deployment doesn't record nodes, so the nodes come from spec.nodeName on the pods under its single ReplicaSet,
    ledger-6564956fdb.
  - Move: at 02:17:24 both pods on cluster-4-worker were deleted. Two replacements were created and scheduled on cluster-4-worker2.
  - Not a rollout: the ReplicaSet is unchanged, so no new revision was created.
  - Cause: this data doesn't say what triggered the move, such as a drain or a node removal.

✻ Sautéed for 53s · done 7:19 PM
```

AI helped

Developers inspect their own workloads, self-service

One place for the platform team’s tools and wrappers

Writes the commands and database queries for us

Data retrieval and correlation

AI helped

Developers inspect their own workloads, self-service

One place for the platform team's tools and wrappers

Writes the commands and database queries for us

Data retrieval and correlation

Tools beat prompts

Wrappers with predefined commands, so there is less to get wrong

One query for a fleet-wide sweep, instead of calling the API cluster by cluster and doing the math

A controlled, on-demand netshoot pod, instead of something always running

AI helped

Developers inspect their own workloads, self-service

One place for the platform team's tools and wrappers

Writes the commands and database queries for us

Data retrieval and correlation

Tools beat prompts

Wrappers with predefined commands, so there is less to get wrong

One query for a fleet-wide sweep, instead of calling the API cluster by cluster and doing the math

A controlled, on-demand netshoot pod, instead of something always running

Still a human

Making and approving every change

Building and maintaining the wrappers

Checking the answer against what the agent ran

What worked

Putting AI where the questions already live.

What worked

Putting AI where the questions already live.

What didn’t

Starting with AI, then looking for a problem.

KubeCon CloudNativeCon
North America 2026

You asked your platform. Now ask us!

Connect with us on LinkedIn

Anton Alexander
linkedin.com/in/aalexan

Scott Adams
linkedin.com/in/codeseer

We promise not to put AI where your question lives.

Scan to share feedback

sfeedback.com/OD5ec0